
PRECAST CONCRETE ROADSIDE BARRIER 690 mm – CRB–H	SP941–01.02.01

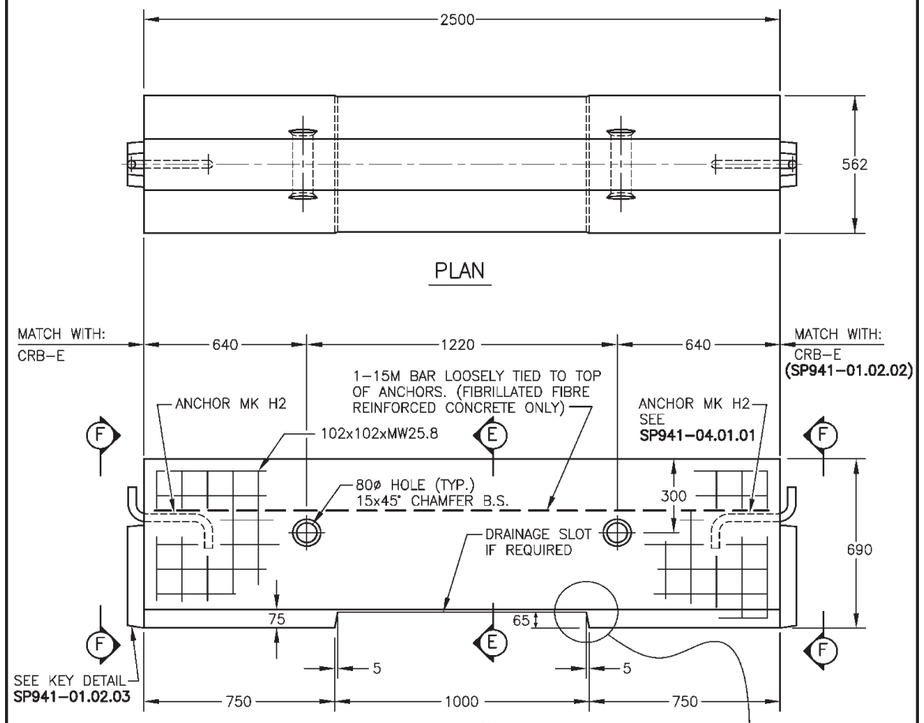

GENERAL NOTES:

1. FOR SECTION (E) SEE **SP941–01.02.02.** FOR VIEW (F) SEE **SP941–01.02.03.**
2. SEE DRAWING **SP941–01.02.02** FOR DETAILS OF EYE UNIT.
3. ALL REINFORCING TO HAVE 50 MINIMUM COVER EXCEPT AS NOTED.
4. ALL TOLERANCES ±3 mm EXCEPT AS NOTED.
5. CHANGES TO PICK–UP HOLE DIAMETERS MAY BE MADE WITH THE WRITTEN PERMISSION OF THE HIGHWAY SAFETY ENGINEER.
6. HOOK AND EYE ANCHORS EACH END SHALL BE SECURED IN PLACE DURING CASTING TO PREVENT DISLODGEMENT.
7. MATERIALS AND QUALITY OF WORK TO BE IN ACCORDANCE WITH SECTION **941.**
8. DRAINAGE SLOT IS REQUIRED WHEN NECESSARY TO DRAIN SURFACE WATER THROUGH THE BARRIER.
9. SHEAR KEY VOID WITH GROUTING HOLES BY REQUEST. SEE **SP941–04.02.01.**
10. FIBRILLATED FIBRE STRAND REINFORCED CONCRETE MAY BE SUBSTITUTED FOR WELDED WIRE MESH REINFORCED CONCRETE.

NOT TO SCALE ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED

TRI KON Precast Concrete Products

Tri-Kon Precast Products Ltd.
601 Patterson Street West
Cranbrook BC V1C 6T3
250-426-8162
info@trikonprecast.com
trikonprecast.com

PRODUCT
Concrete Barrier
DRAWING
CRB-H 690mm Concrete Roadside Barrier

WEIGHT
2850 lbs

DRAWING NO.
SP941-01.02.01
SHEET
19 of 25

DATE
As per drawing
UNITS / SCALE
As per drawing

Request A Quote

Dimensions and specifications as per drawing. Confirm handling weights before lifting.
trikonprecast.com