




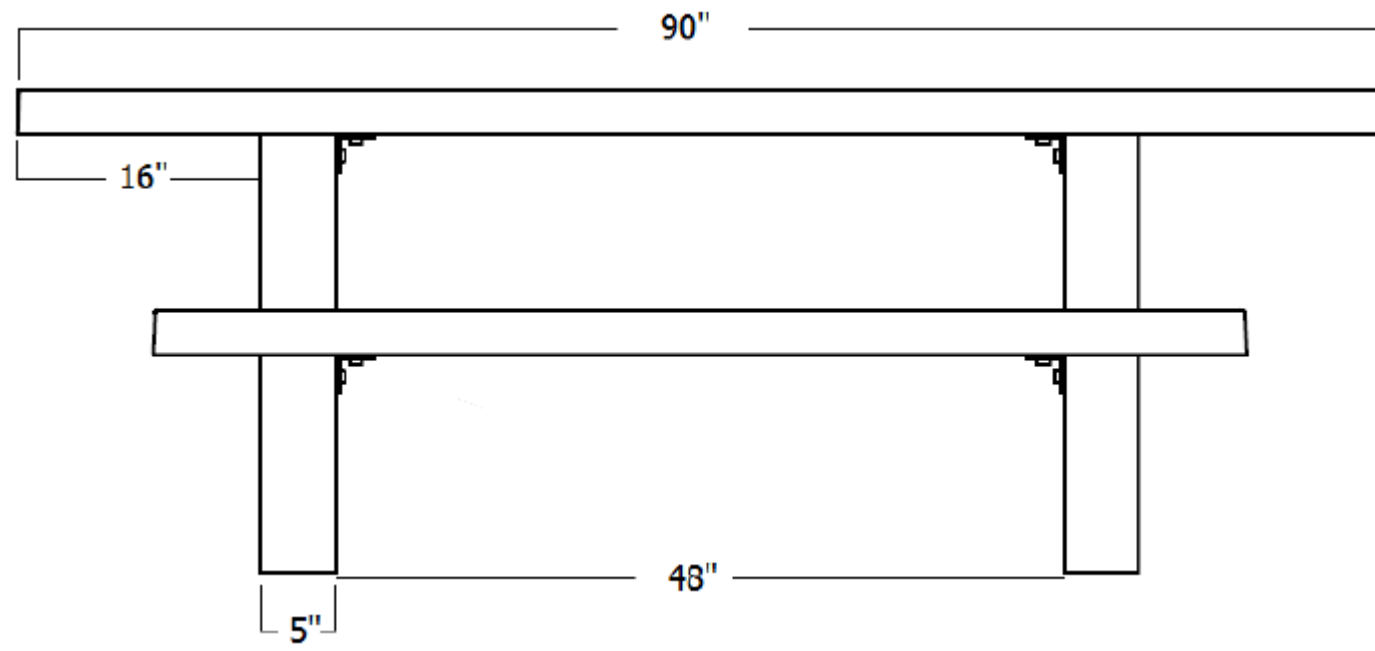

Side View - Wheelchair Accessible

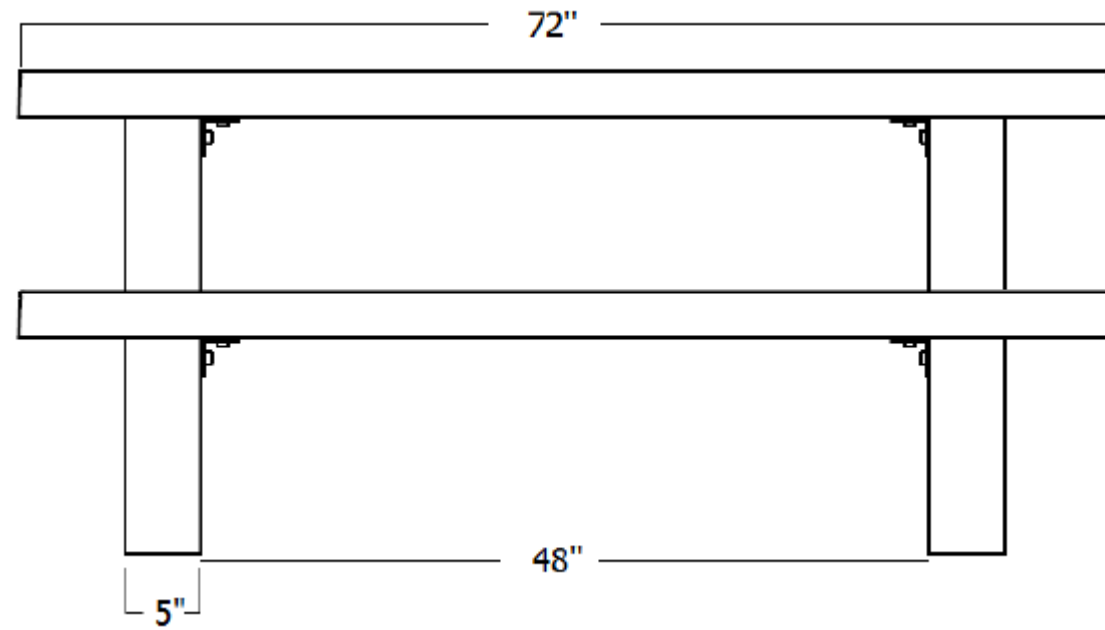


Side View - Regular Table

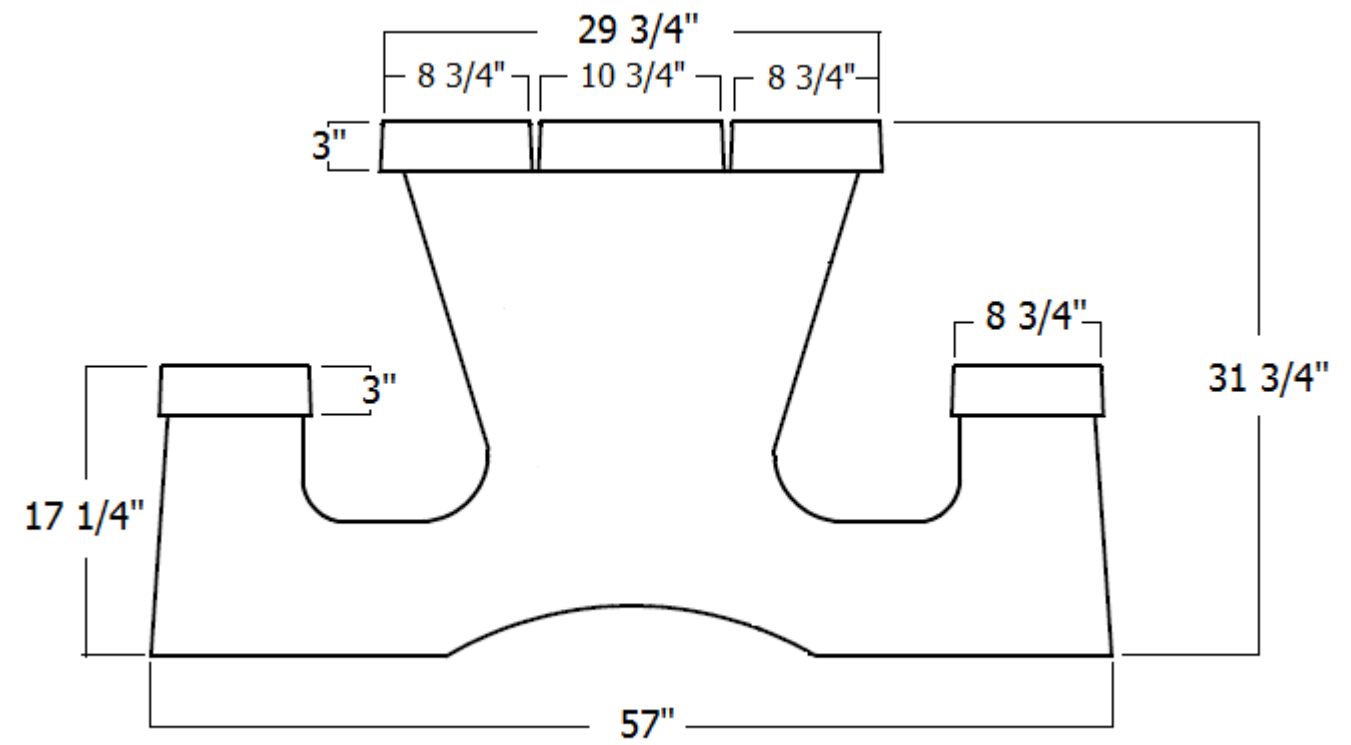

End View

*Not to scale

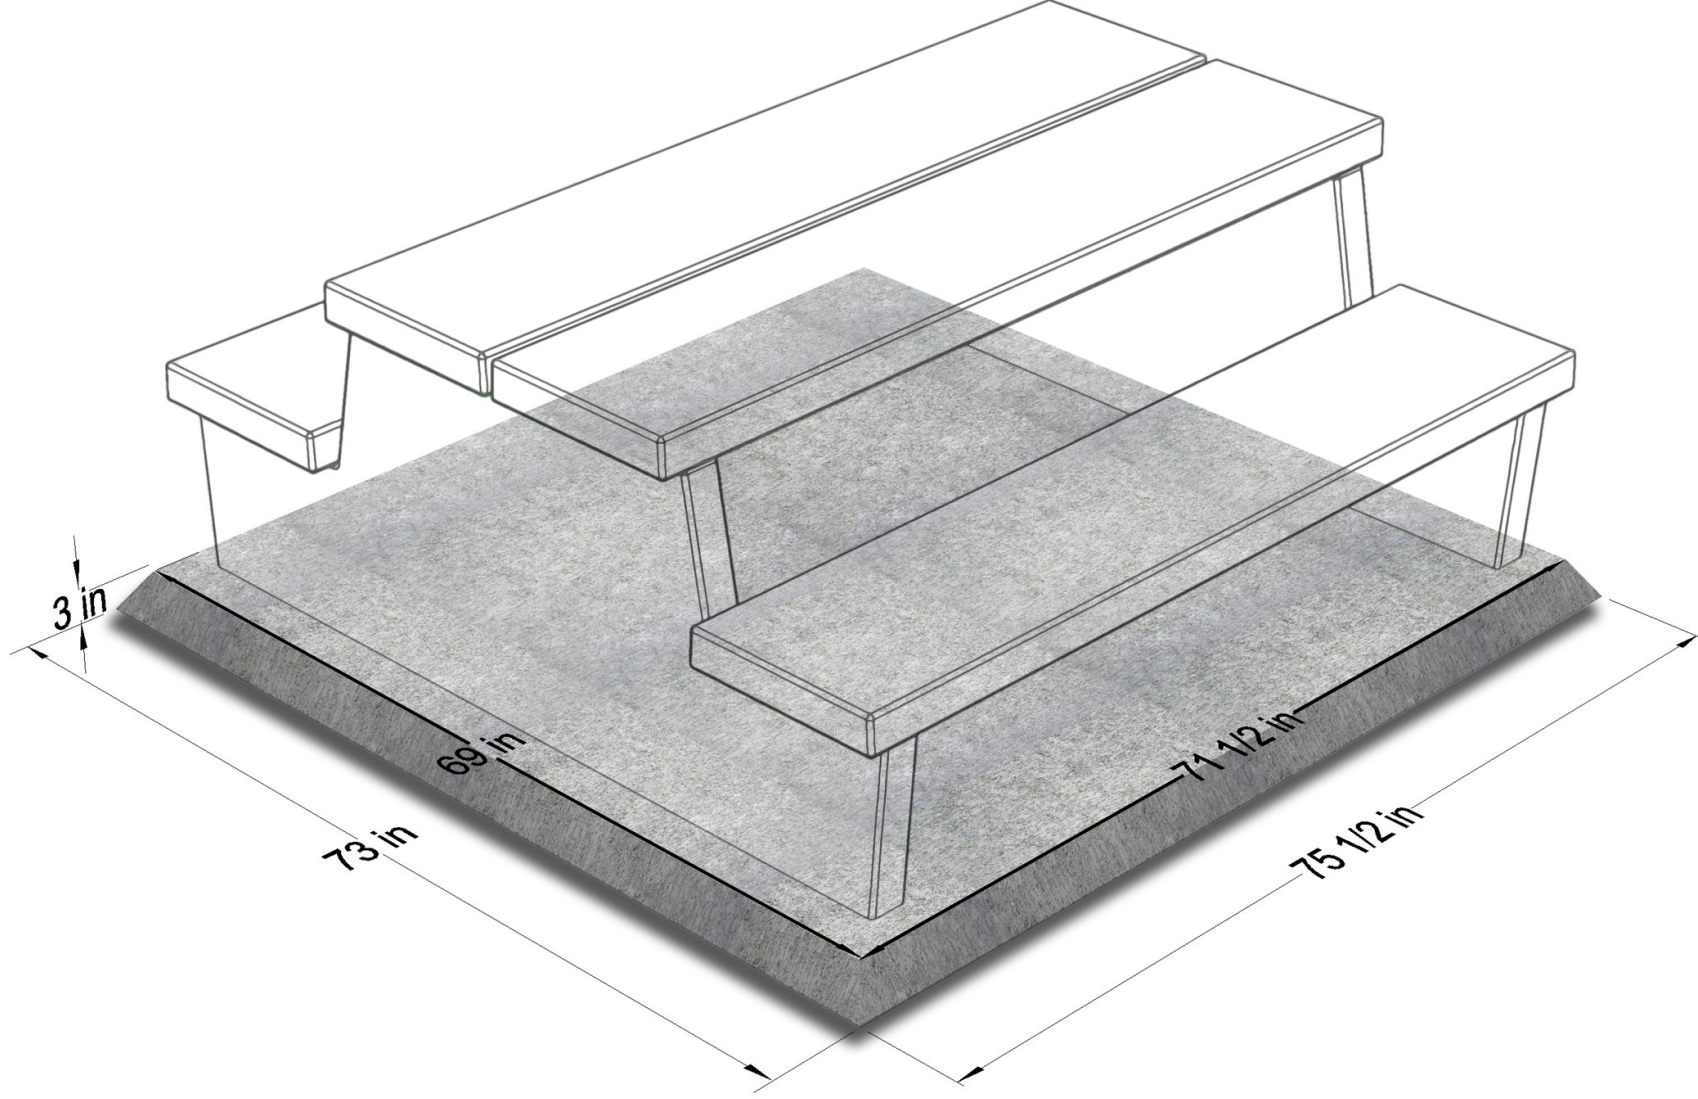

PICNIC TABLE NO. 1 BASE

DRAWN: RAB


FEB 09/2009

NOT TO SCALE

601 Patterson West
Cranbrook, B.C.
PO BOX 491 V1C 4J6
Phone 250-426-8162
Fax 250-489-4013
email: info@trkonprecast.com
www.trkonprecast.com

TRKon
Precast
Concrete Products

Table available with a terrazzo finish or with a plain concrete finish

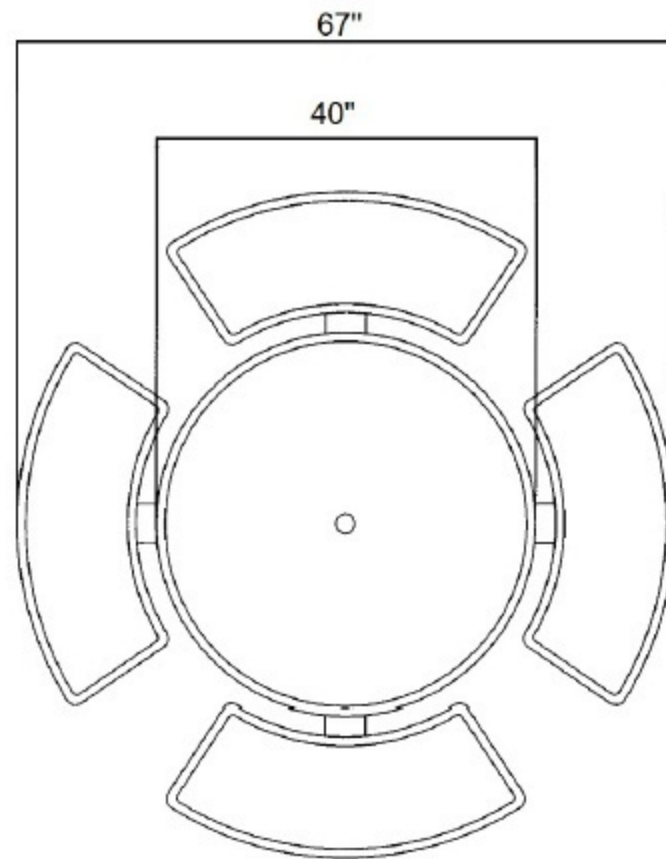

Notes:

Table Top: 40" x 2 1/4" thick
Curved Seats: 40" x 10 1/4" x 2" thick

Weight: 1100 lbs.
Material: Reinforced Concrete
Reinforcing: 1/4" Steel Rebar

Terrazzo Finish



Plain Concrete

Note:

Plain Concrete finish comes with exposed legs only, not the sides of the seat/top as shown.


Installation Instructions for Round Picnic Table

****Note: Handle ALL concrete parts carefully.****

Step 1	First, determine the area where your table(s) are going to be installed. Each table is 67 inches in diameter.
Step 2	Using a two wheeled moving dolly, move the bottom leg (leg with a rectangle notch on the top) into position. Do not leave legs sitting upright unattended in case they should tip over causing damage or injury! Position a top leg (leg with a rectangle notch on the bottom) at the end of the bottom leg. Now install 2 seat brackets on each end of the leg using the 7" x $\frac{3}{8}$" bolts, nuts and 4 fender washers per bolt. Just finger tight for now. Carefully lift the top leg over the bottom leg and into the notch on the bottom leg. (When lowering do not allow it to jam and don't force it down.)
Step 3	Install the large table top plate. (Keep rotating until the 2 holes line up with the holes in the legs. Insert 2 of the 7" bolts thru the holes in the legs. Use one of the fender washers on the steel bracket side and 2 or 3 on the concrete side. Now using a broom handle, line up the umbrella holes in the legs, then tighten the 7" bolts until the washers bend slightly.
Step 4	Now place the table top on the steel plate, slowly and carefully rotate the top until you line up one of the 4 inserts in the bottom of the table top with one of the holes in the steel plate. Then install one 1" x $\frac{1}{4}$" x $\frac{3}{8}$" bolts with one fender washer. Adjust the table top until the other 3 holes line up and insert and install remaining 1" x $\frac{1}{4}$" x $\frac{3}{8}$" bolts and fender washers. (Do NOT over tighten the bolts. $\frac{1}{4}$ turn past snug.)
Step 5	Install the seats one at a time using 4 of the 1 $\frac{1}{4}$ " x $\frac{3}{8}$ " bolts per seat. Each of the 4 bolts should have a rubber washer sandwiched between 2 fender washers. Tighten these bolts carefully, until the rubber washer is slightly compressed.
Step 6	Be sure all the legs are touching the ground and not hung up or on uneven ground. If the site is uneven use shims to make the legs level.
Step 7	Level the seats and tighten the 7" bolts very tight, until the washers bend slightly.

APPROXIMATE WEIGHT: 2000 LBS / 900 KG

AVAILABLE IN EXPOSED AGGREGATE OR SMOOTH FINISH

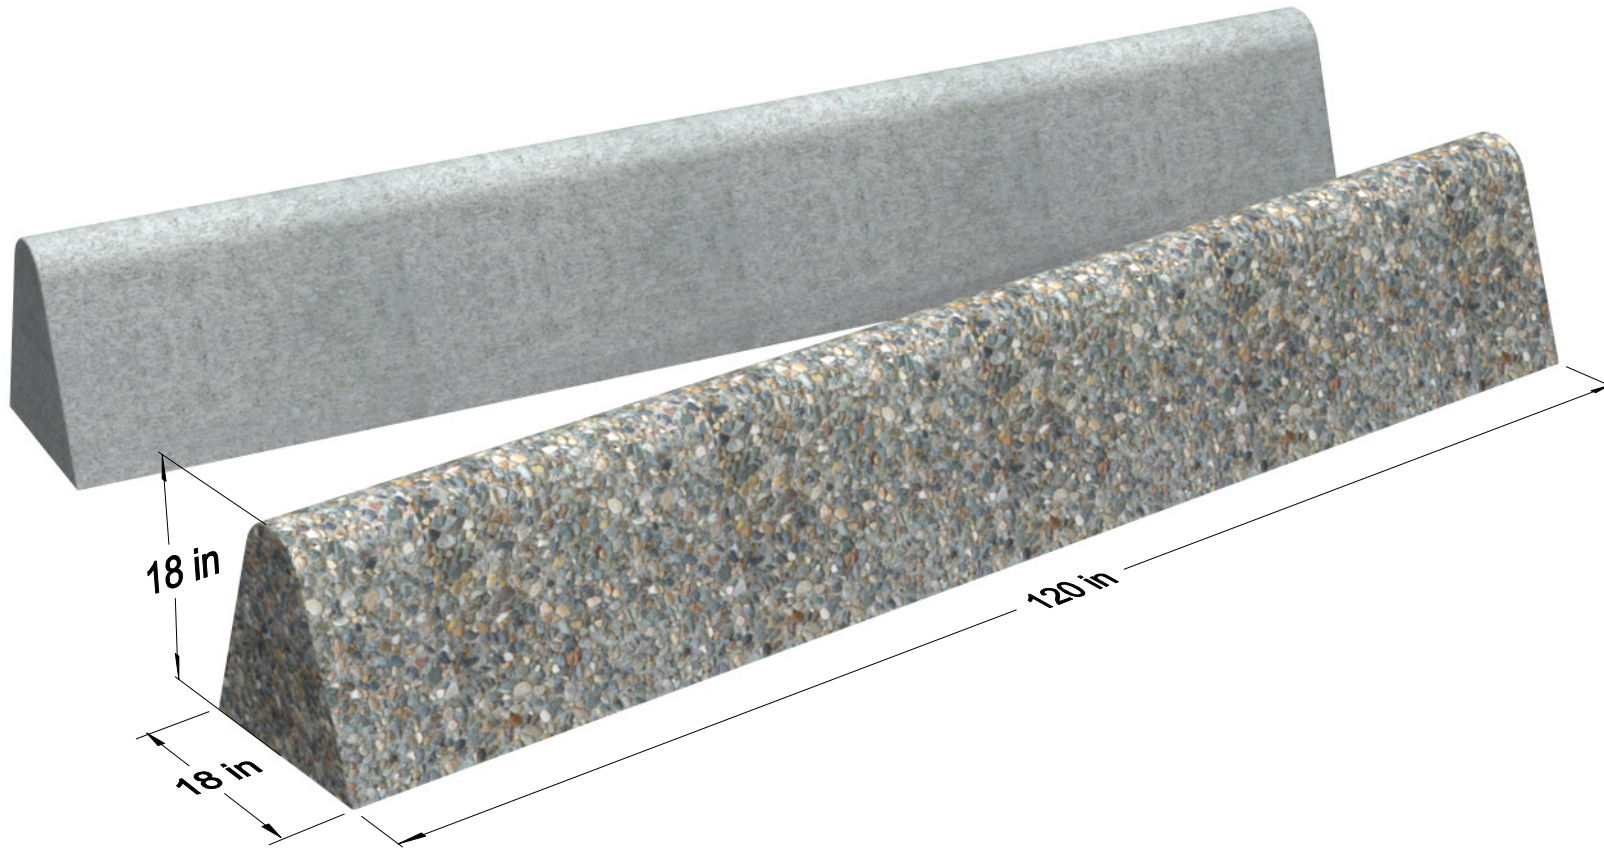

18 IN ROAD SIDE BARRIER


DRAWN: RAB

FEB 20/2009

NO SCALE

601 Patterson West
Cranbrook, B.C.
PO BOX 491 VIC 4J6
Phone 250-426-8162
Fax 250-489-4013
email: info@trikonprecast.com
www.trikonprecast.com



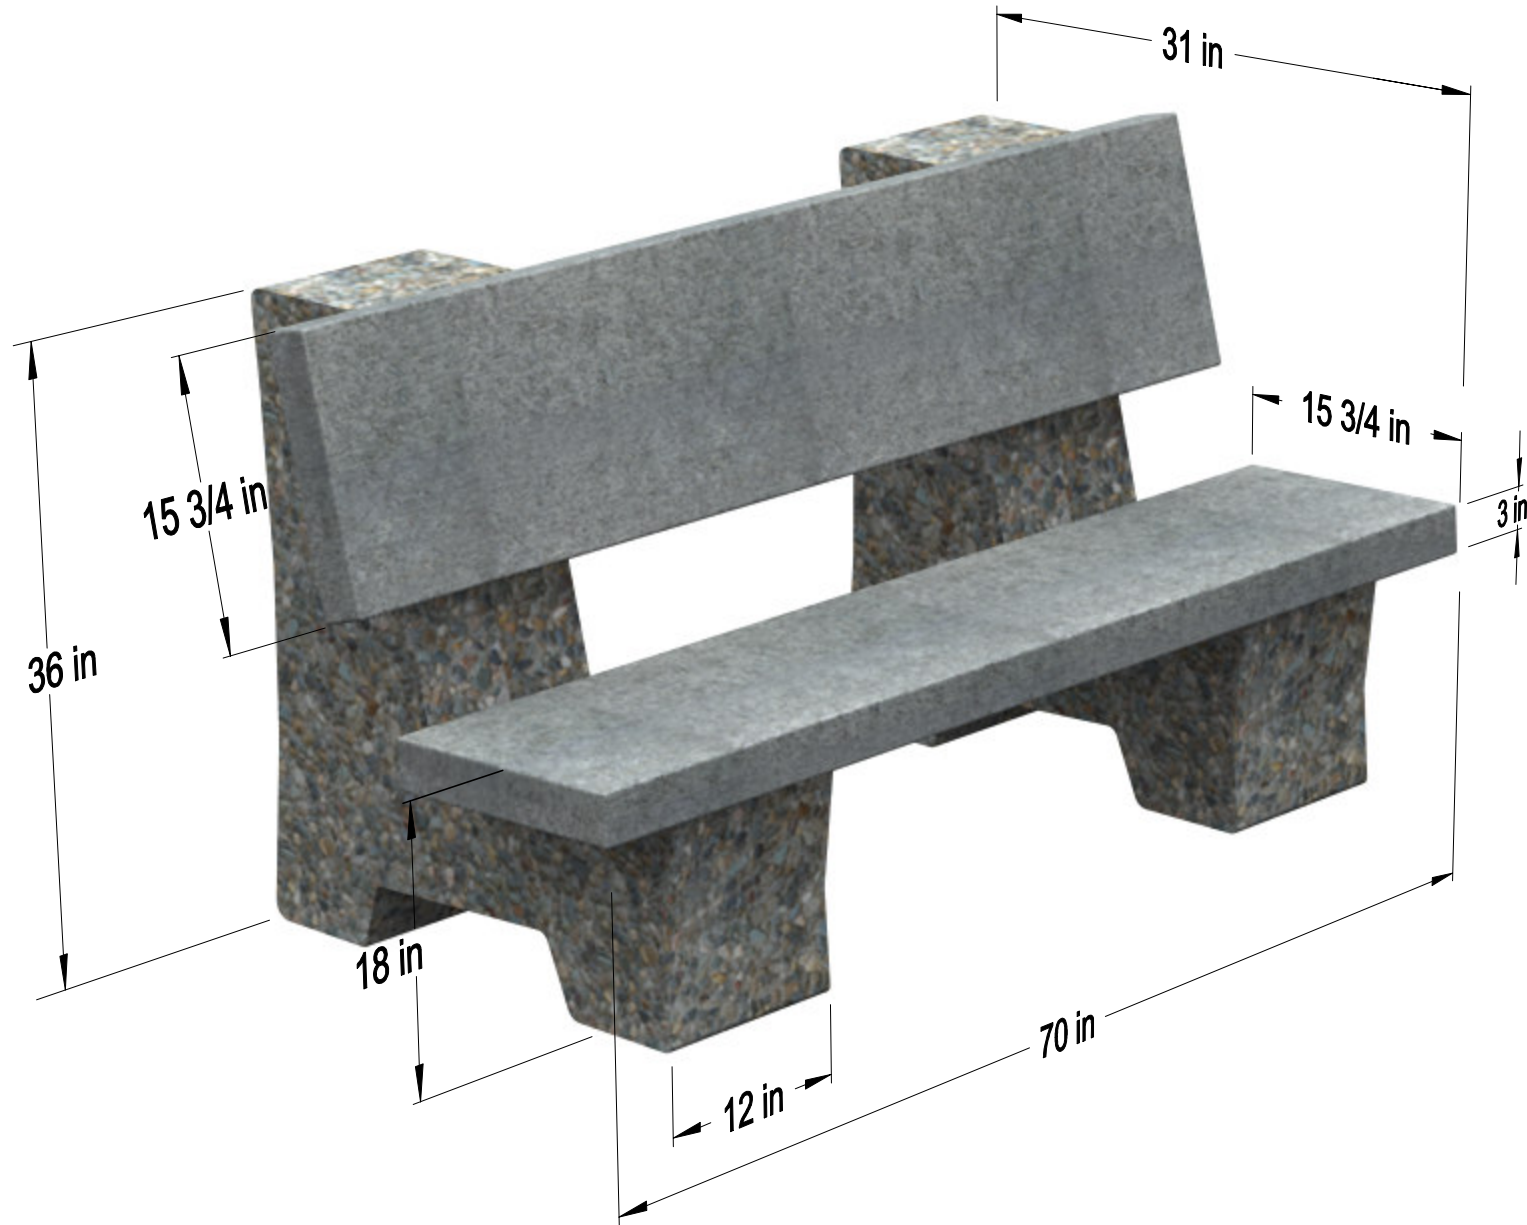


601 Patterson West
Cranbrook, B.C.
PO BOX 491 VIC 4J6
Phone 250-426-8162
Fax 250-489-4013
email: info@trikonprecast.com
www.trikonprecast.com

NEW PARK BENCH

DRAWN: RAB

FEB 14/2009

NOT TO SCALE

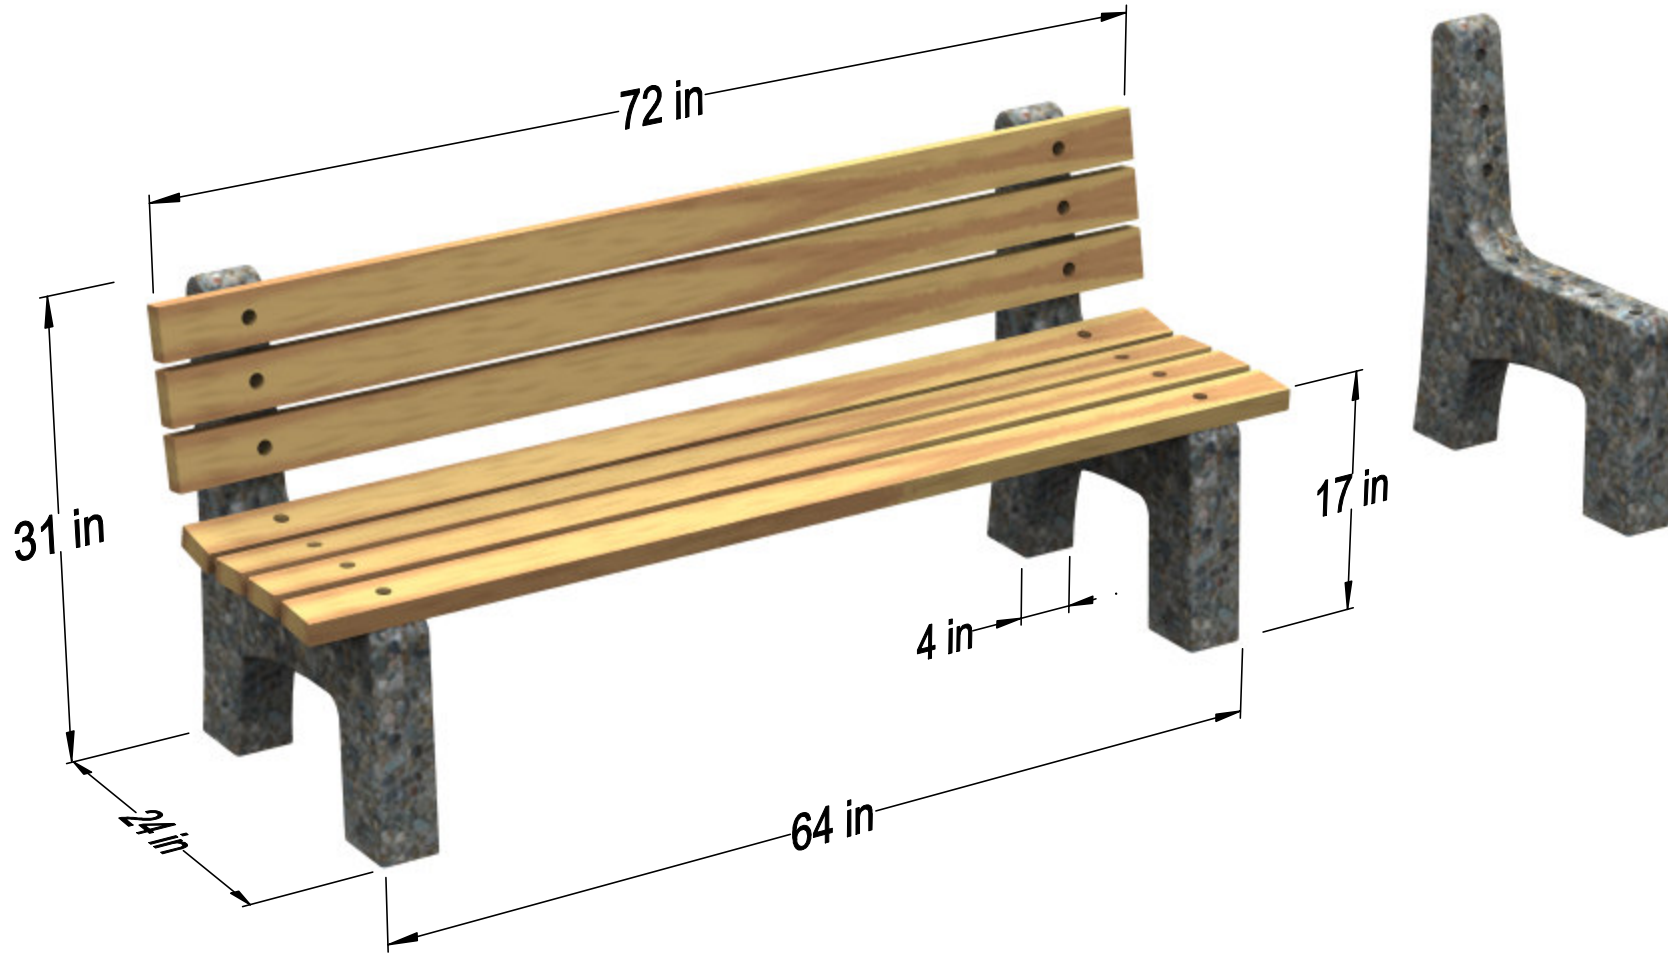


601 Patterson West
Cranbrook, B.C.
PO BOX 491 VIC 4J6
Phone 250-426-8162
Fax 250-489-4013
email: info@trikonprecast.com
www.trikonprecast.com



PARK BENCH ENDS

DRAWN: RAB

FEB 10/2009



NOT TO SCALE

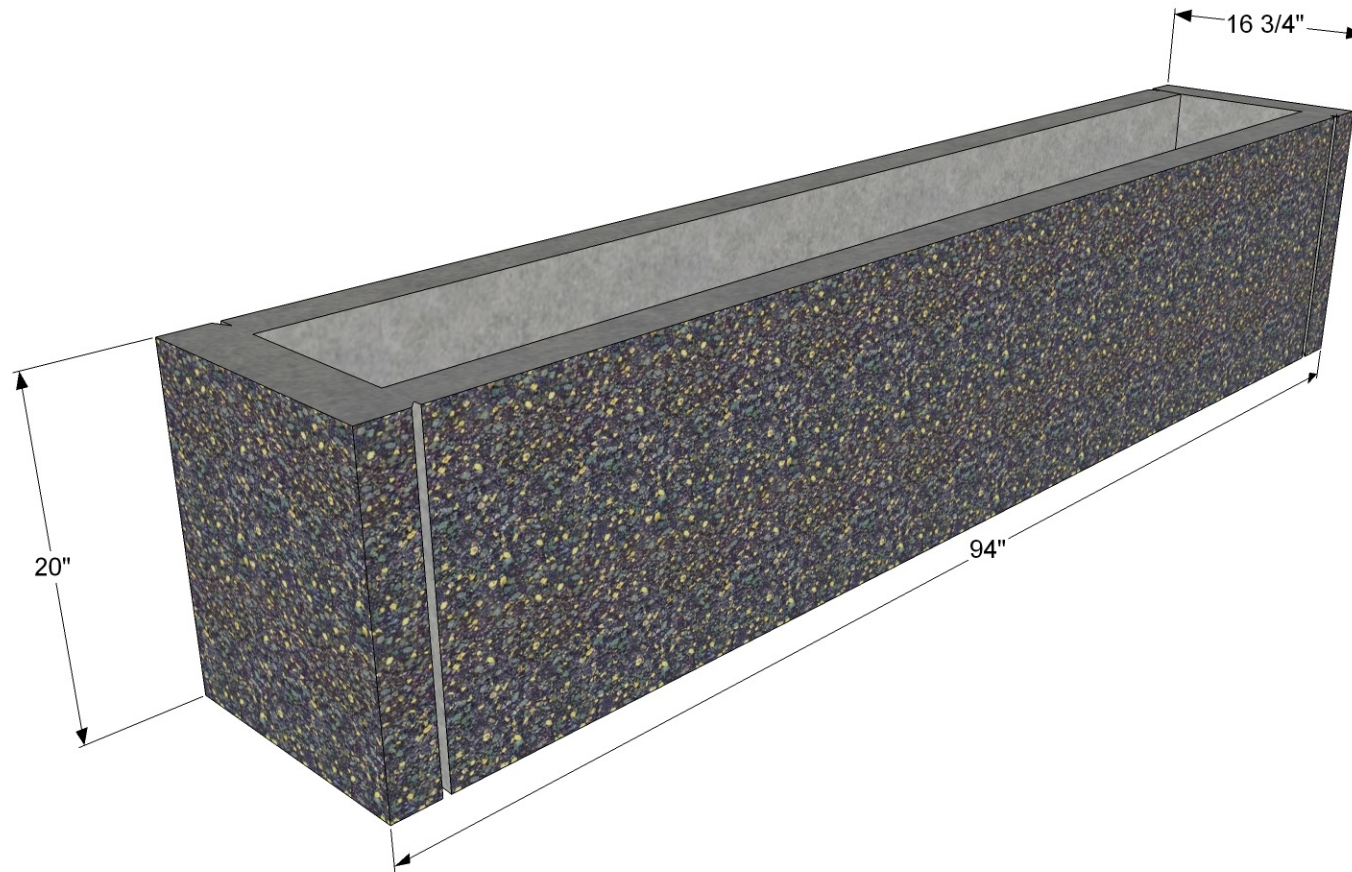

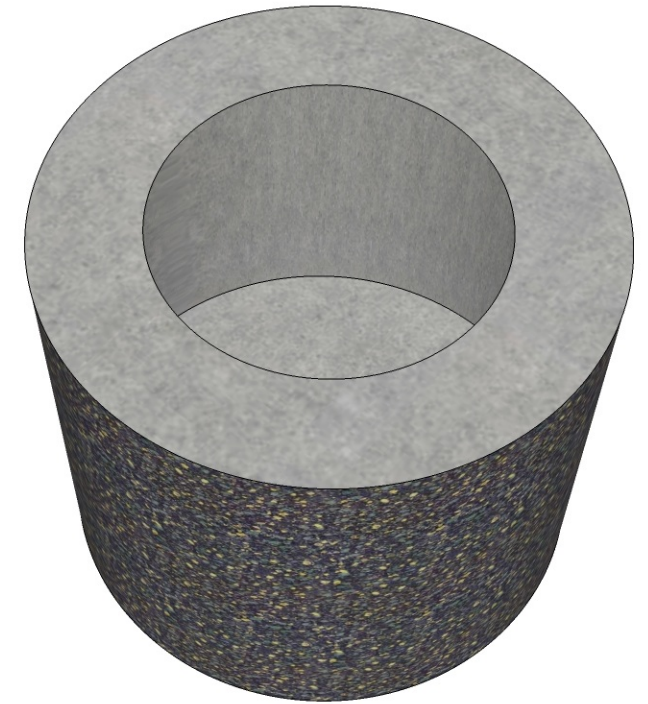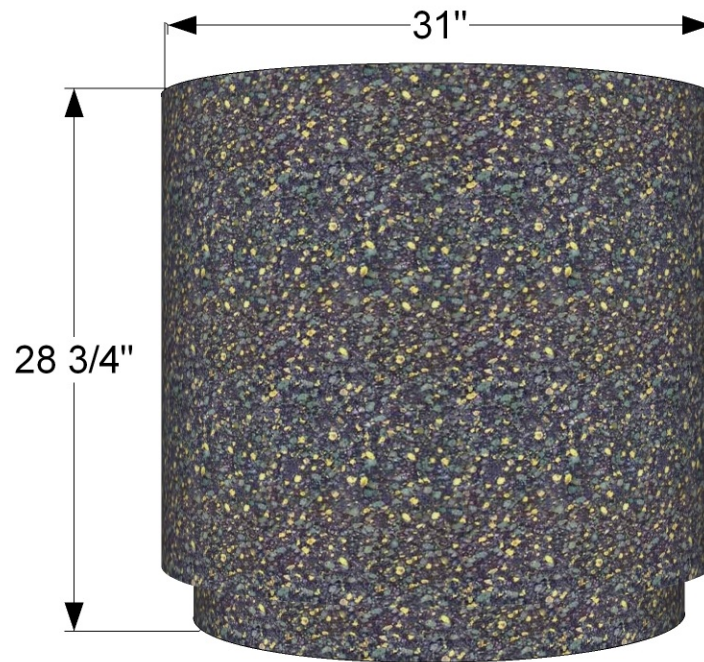

Notes:

Available with smooth or exposed aggregate finish on top.
Top lip is 6"

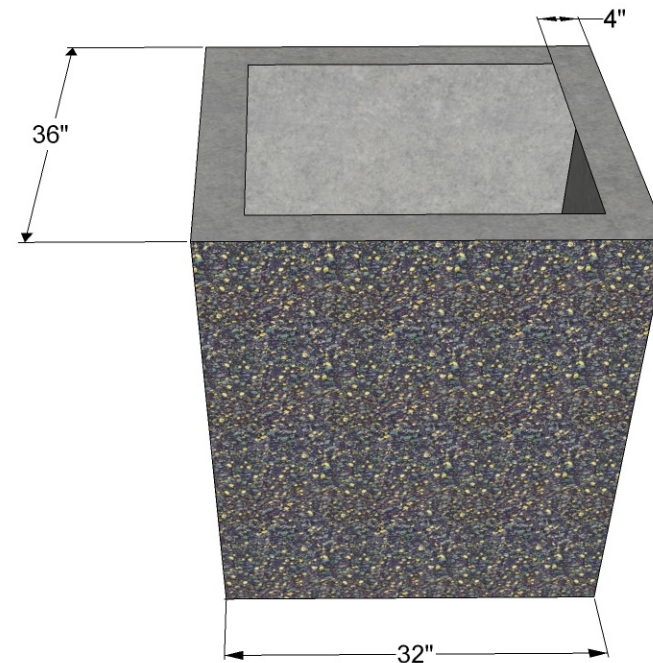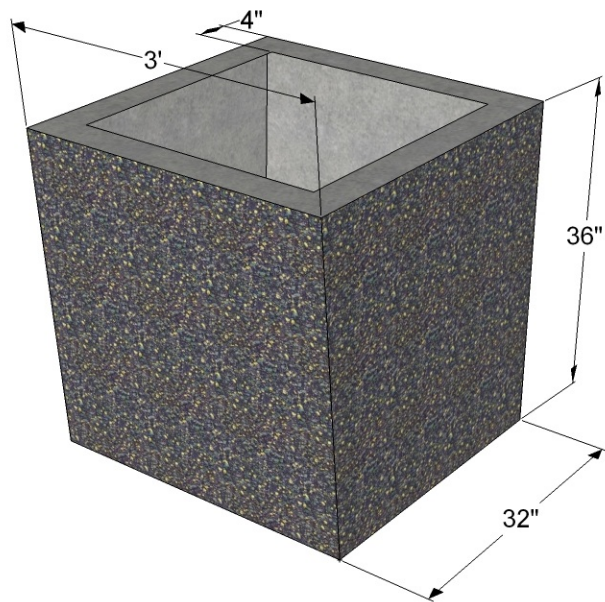



Approximate Weight: 180 lbs / 82 kg

BIRD BATH


NOT TO SCALE

FEB 09/2009

DRAWN: RAB

601 Patterson West
Cranbrook, B.C.
PO BOX 491 V1C 4J6
Phone 250-426-8162
Fax 250-489-4013
email: info@trikonprecast.com
www.trikonprecast.com

TRIKON
Precast
Concrete Products

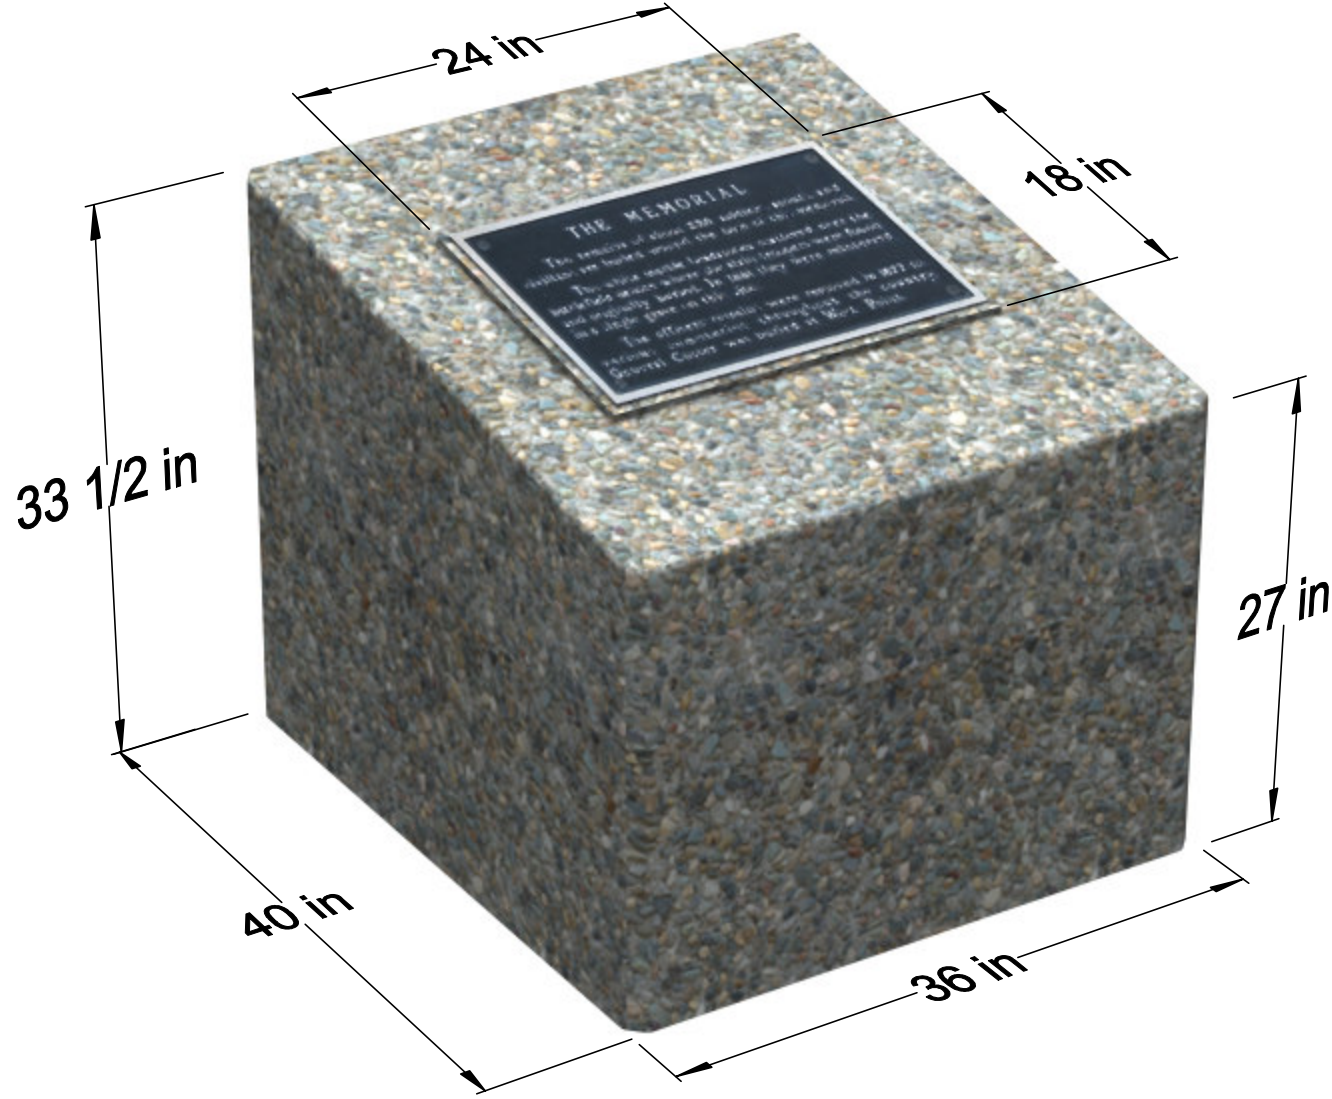

MONUMENT MARKER

DRAWN: RAB

FEB 09/2009

NOT TO SCALE