
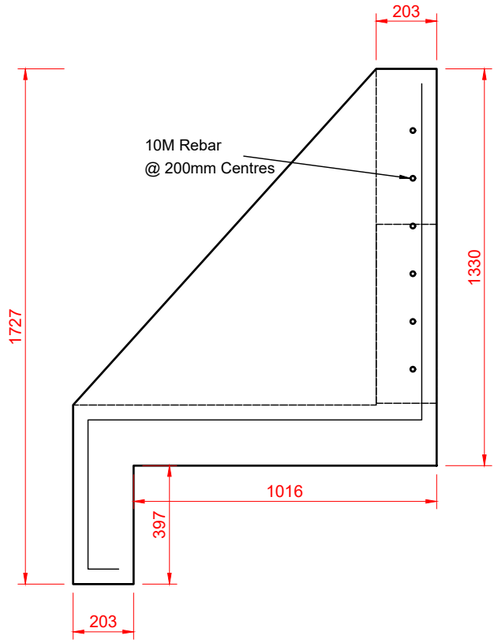


Side View

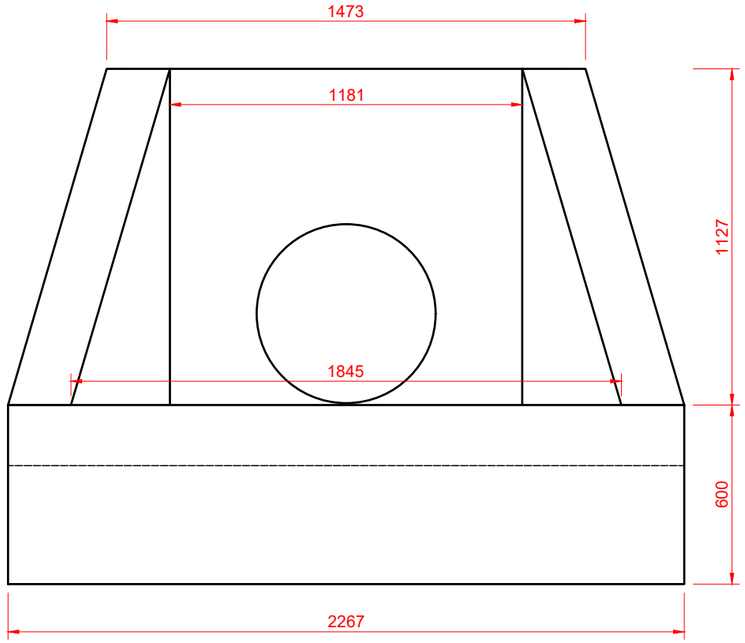

Front View

Reinforcing

1. Reinforcing steel is to conform to CSA G30.12M - Grade 400 MPa.
2. Reinforcing steel is to be placed as detailed to 10mm tolerance and supported by metal or plastic supports and/or hangers per CAN/CSA A23.1.
3. Lap all reinforcing bar splices 32 bar diameters minimum unless indicated otherwise on the drawings.
4. Reinforcing steel is to be clean, free of corrosion & undamaged.
5. Do not weld bars or use heat to bend reinforcing steel.
6. Concrete cover over reinforcement is to be 50mm unless otherwise noted on drawings.

Item	Agg. Size	Strength	W/C	Air %	Cement Type	Exposure
Headwall	20mm	45 MPa	0.40	4-7	HS	F-2

Tri-Kon Precast Products Ltd.
601 Patterson Street West
Cranbrook BC V1C 6T3
250-426-8162
info@trikonprecast.com
trikonprecast.com

PRODUCT
Headwall

DRAWING
11-13 Headwall

WEIGHT

DRAWING NO.
HW11-13

SHEET
02 of 12

DATE

UNITS / SCALE
mm / 1:20

Request A Quote