

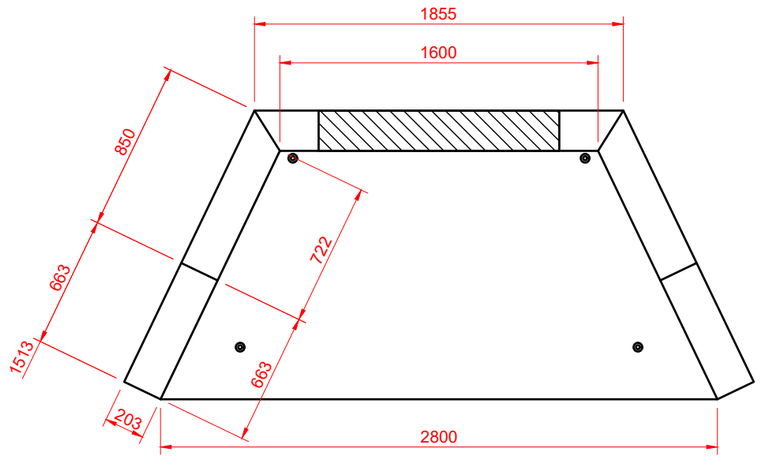


Plan View

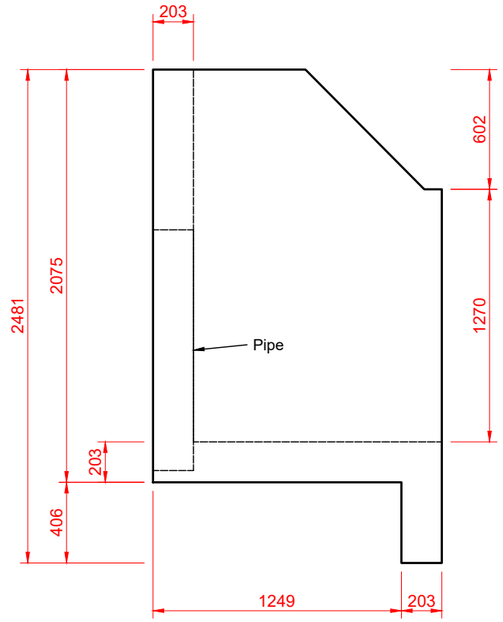

Side

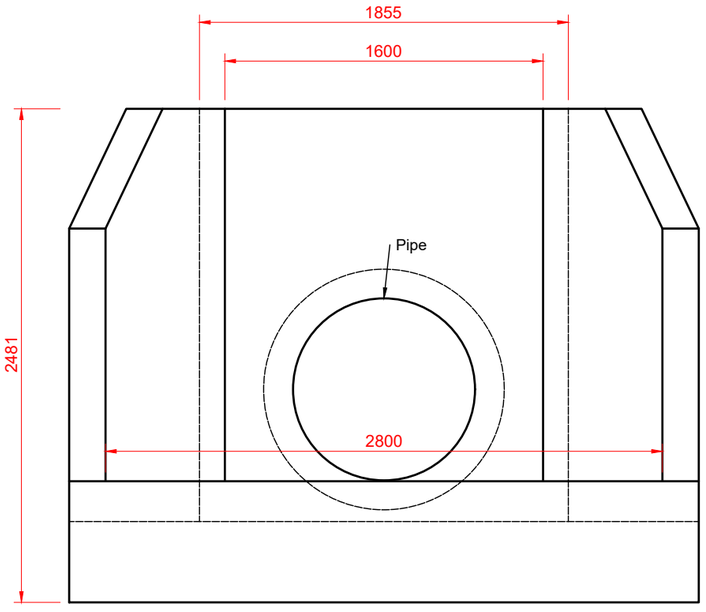

Front

Notes

HW 16-20 built as shown.
Rough core for outlet/inlet as required.
Recommended max. hole core size is 1400mm.
Outlet/inlet grills & handrails are optional.
Includes lifting pins as required.
Min. rebar yield strength is 410 MPa.
Min. concrete strength is 30 MPa.
All measurements are in mm (unless otherwise noted).

Tri-Kon Precast Products Ltd.
601 Patterson Street West
Cranbrook BC V1C 6T3
250-426-8162
info@trikonprecast.com
trikonprecast.com

PRODUCT
Headwall

DRAWING
HW 16-20

WEIGHT

DRAWING NO.
HW16-20

DATE

SHEET
05 of 12

UNITS / SCALE
mm / 1:30

Request A Quote