
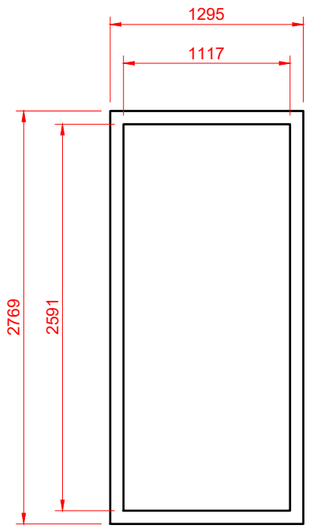


Top View


Vault Under Slab

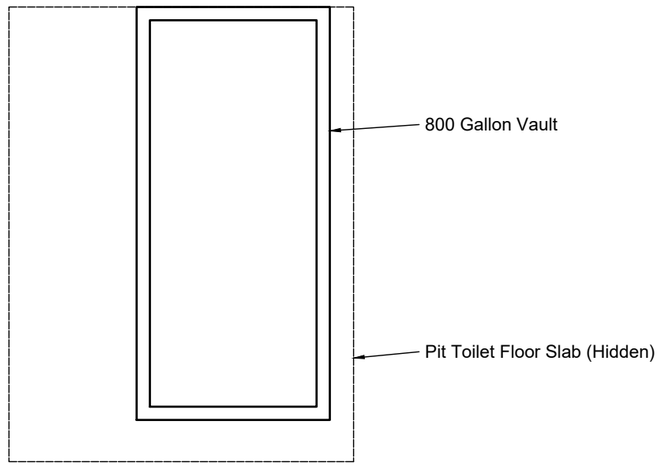

800 Gallon Pit Toilet Vault

Specification for Vault

800 gallon tank to have no inlet, outlet or baffle.
Concrete to be minimum 35 MPa with 5-8% air entrainment.
Structural fibre bond added to concrete.
Concrete to contain waterproofing additive (Xypex C-500).
10mm rebar on 6" centres each way, steel 25mm off bottom.
4" x 4" x 10/10 welded wire mesh on all sides of tank.
Includes Conseal CS-101 adhesive gasket for sealing the concrete floor (lid) to the tank.

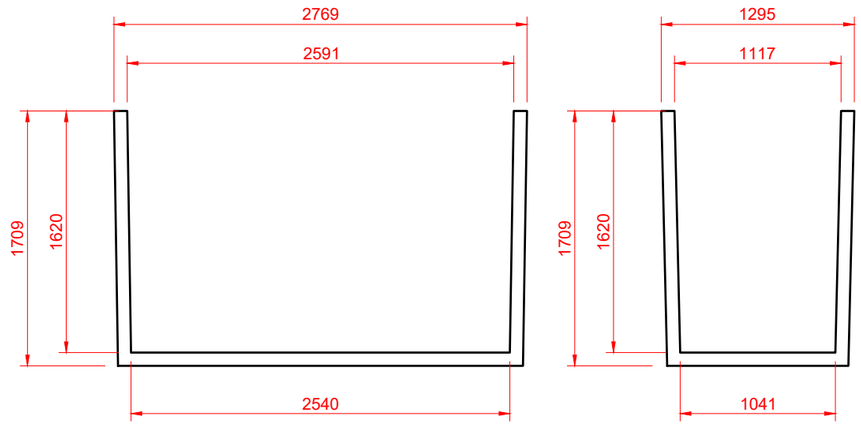

Front View

End View

Tri-Kon Precast Products Ltd.
601 Patterson Street West
Cranbrook BC V1C 6T3
250-426-8162
info@trikonprecast.com
trikonprecast.com

PRODUCT
Septic

DRAWING
800 Gallon Pit Toilet Tank

WEIGHT


DRAWING NO.

DATE

SHEET
14 of 24


UNITS / SCALE
mm / 1:40

Request A Quote

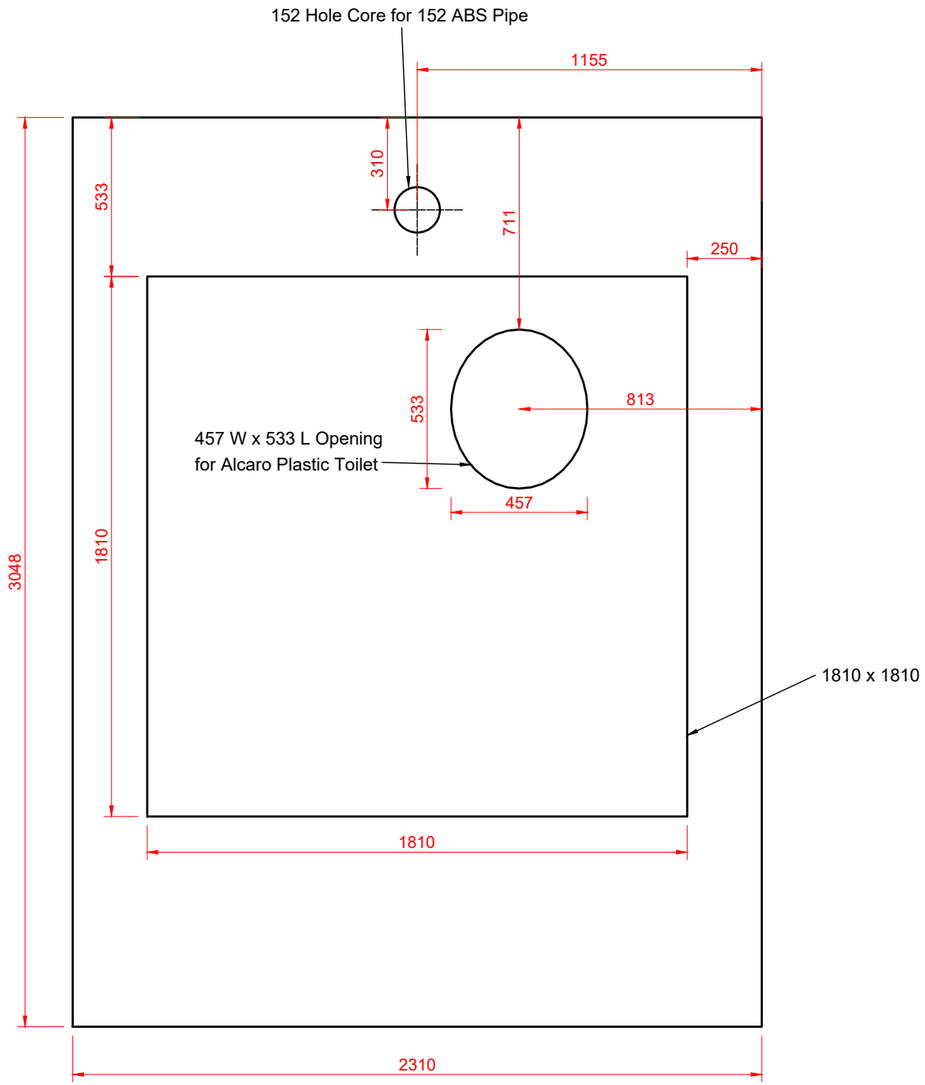


Top View

Pit Toilet Floor Slab

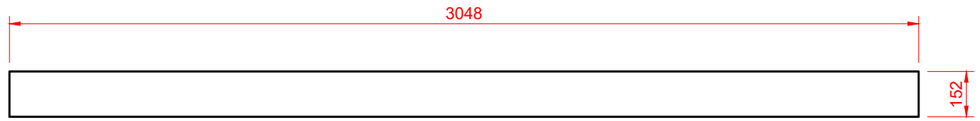

Side View

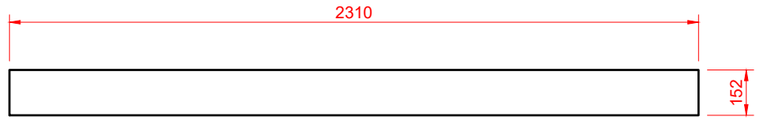

End View

Specification for Floor

Concrete to be minimum 35 MPa with 5-8% air entrainment.
Structural fibre bond added to concrete.
Concrete floor to be 6" thick with 10mm rebar mat @ 6" centres.
Concrete floor finish to be a light broom finish.

Tri-Kon Precast Products Ltd.
601 Patterson Street West
Cranbrook BC V1C 6T3
250-426-8162
info@trikonprecast.com
trikonprecast.com

PRODUCT
Septic

DRAWING
Pit Toilet Floor Slab

WEIGHT

DRAWING NO.

DATE

SHEET
15 of 24

UNITS / SCALE
mm / 1:20

Request A Quote