
Product List


Item	Qty	Product	Weight
1	1	Type I Vault	1,680 kg
2	1	Type I Lid	600 kg

Notes


1. Type I reinforced concrete vault is built as shown.
2. Unit designed to withstand AASHTO HS20 / BCL-625 live loading.
3. Concrete vault designed for earth cover of 0m minimum, 2.5m maximum.
4. Unit supplied with lifting inserts as required.
5. Unit supplied with opening for access as required.
6. Design can be modified for specific sites, please contact TK office.
7. Unit to have 4 - 51mm vent holes as shown.
8. Oil interceptor supplied with 12 gauge galvanized baffles as shown.
9. Unit has a maximum 595 litre [0.595 m³] capacity.
10. Minimum rebar yield strength: 414 MPa.
11. Minimum concrete strength: 35 MPa.
12. PVC T required by design, supplied and installed by others in field.
13. All dimensions are in millimetres.

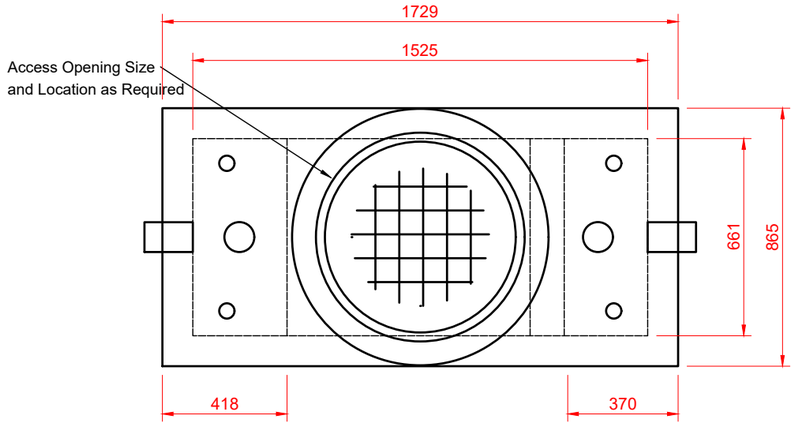


Plan View

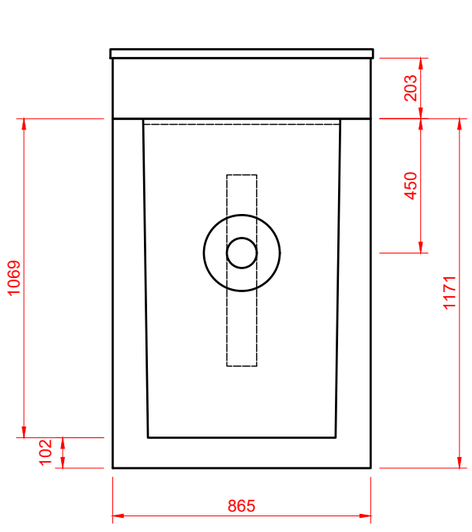

East View

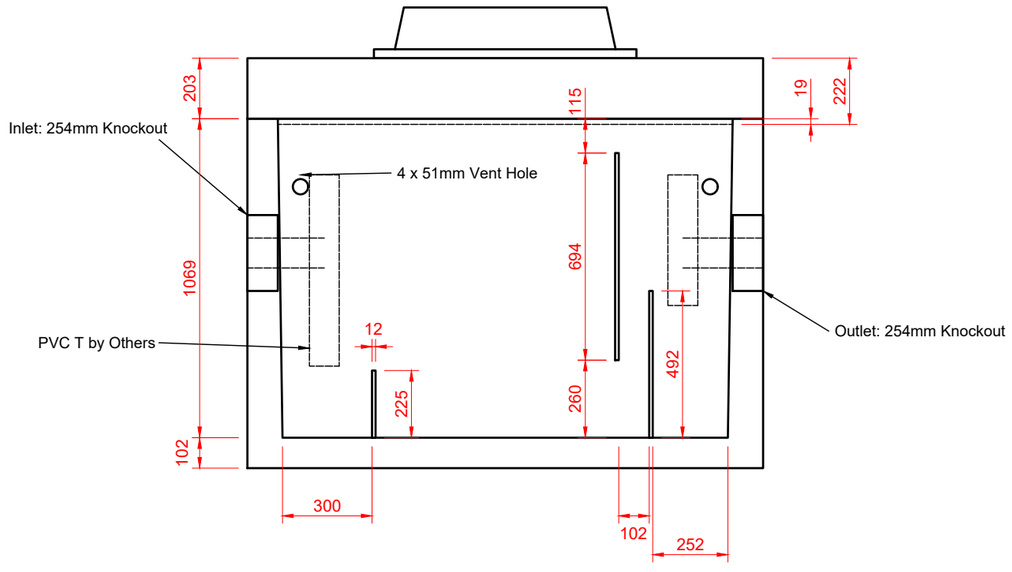

Front View

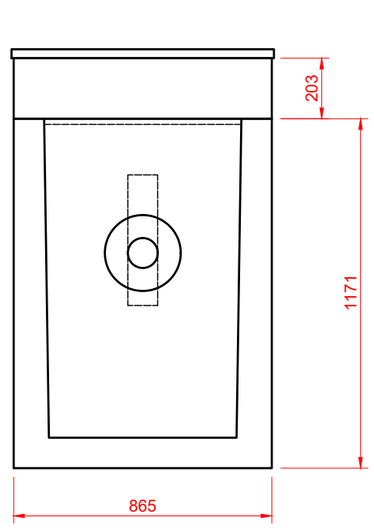

West View

Tri-Kon Precast Products Ltd.
601 Patterson Street West
Cranbrook BC V1C 6T3
250-426-8162
info@trikonprecast.com
trikonprecast.com

PRODUCT
Vault & Oil Separator
DRAWING
Type 1 Oil Separator

WEIGHT
Vault: 1,680 kg Lid: 600 kg

DRAWING NO.
OILSEPTYPE1

DATE

SHEET
11 of 12

UNITS / SCALE
mm / 1:20

Request A Quote