

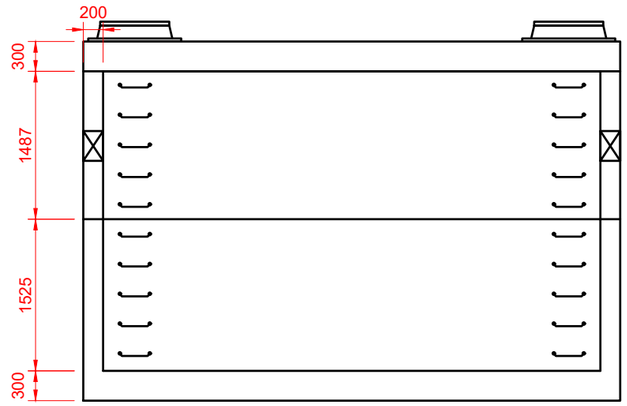



Front View

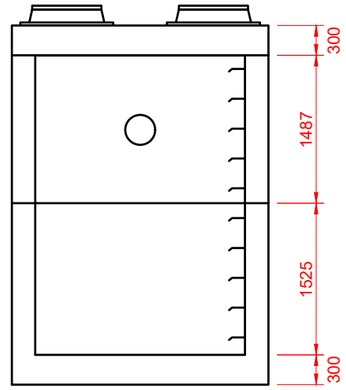

End View A

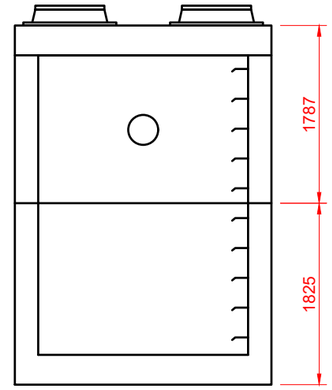

End View B

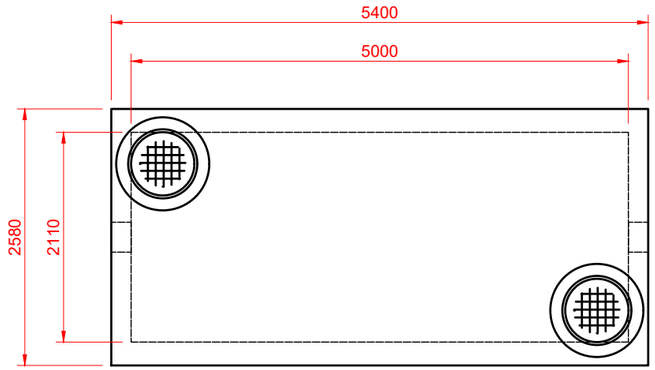

Top View

Notes

1. Manufactured to meet AASHTO HS20/BCL-625 live loading.
2. Concrete vault designed for minimum 0m to maximum 2.5m cover.
3. Unit supplied with rough cores for inlet/outlet.
4. Unit supplied with required opening(s) in lid.
5. Unit supplied with ladder rungs if required.
6. Minimum rebar yield strength: 414 MPa.
7. Minimum concrete strength: 35 MPa.
8. All dimensions are in millimetres.

Top Section - 41,006 lbs
Bottom Section - 42,836 lbs

Tri-Kon Precast Products Ltd.
601 Patterson Street West
Cranbrook BC V1C 6T3
250-426-8162
info@trikonprecast.com
trikonprecast.com

PRODUCT
Vault & Oil Separator

DRAWING
5212 Vault

WEIGHT


DRAWING NO.

DATE


SHEET
06 of 12

UNITS / SCALE
mm / 1:60


Request A Quote

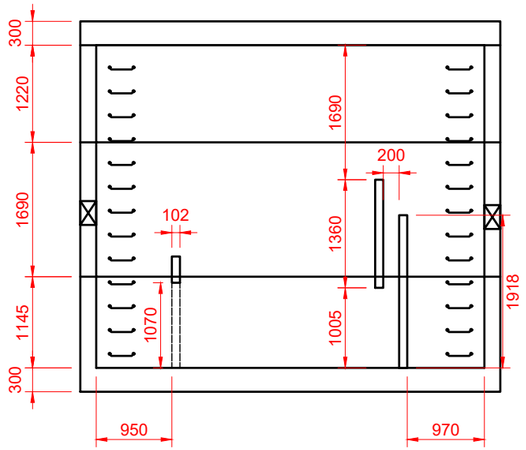


Front View

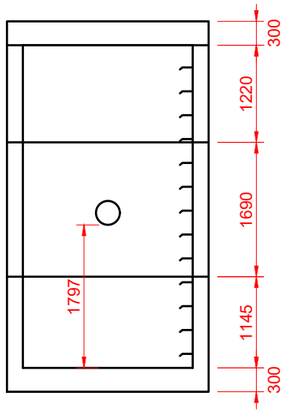

End View A

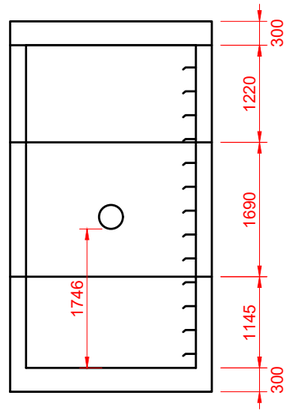

End View B

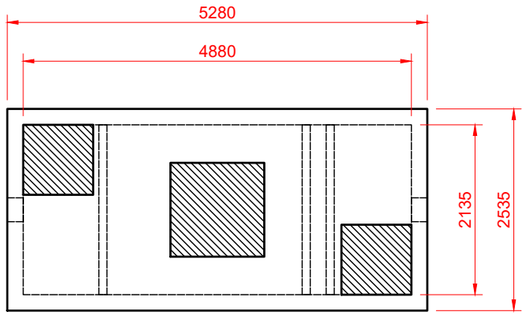

Top View

Notes

1. Manufactured to meet AASHTO HS20/BCL-625 live loading.
2. Concrete vault designed for minimum 0m to maximum 2.5m cover.
3. Unit supplied with rough cores for inlet/outlet.
4. Unit supplied with required opening(s) in lid.
5. Unit supplied with ladder rungs if required.
6. Oil interceptor includes 102mm thick concrete baffles.
7. Minimum rebar yield strength: 414 MPa.
8. Minimum concrete strength: 35 MPa.
9. PVC T supplied & installed by contractor.
10. Unit has a maximum 13,020 litre [13.02 m³] capacity.
11. All dimensions are in millimetres.

Tri-Kon Precast Products Ltd.
601 Patterson Street West
Cranbrook BC V1C 6T3
250-426-8162
info@trikonprecast.com
trikonprecast.com

PRODUCT
Vault & Oil Separator

DRAWING
5212 Oil Interceptor, API

WEIGHT

DRAWING NO.

DATE

SHEET
07 of 12

UNITS / SCALE
mm / 1:75

Request A Quote